

MYPro series MYTower™ component storage

Specifications
May 2025



Specifications MYPro series **MYTower™**

CAPABILITY	
Reel size dim x height	4" x 8-32mm
	7" x 8-32mm
	13" x 8-56mm
	15" x 8-56mm
	4-32mm (7"/180mm reels)
	4-56mm (13"/300mm reels)
	4-56mm (15"/380 mm reels)
Average time to unload reels	5 reels/minute

CAPACITY		
MAXIMUM REELS		
Tower model	Diameter x height	Number of reels
MYTower 5	4"-7" x 8mm	812
MYTower 6	4"-7" x 8mm	980
MYTower 6+	4"-7" x 8mm	980
MYTower 7+	4"-7" x 8mm	1,148
MYTower 5x	4"-7" x 8mm	1,652
MYTower 6x	4"-7" x 8mm	1,988

MAGAZINES			
Reel width	4-7" Reel diameter	13" Reel diameter	15" Reel diameter
4mm	•	•	•
8mm	•	•	•
12mm	•	•	•
16mm	•	•	•
24mm	•	•	•
32mm	•	•	•
44mm		•	•
56mm		•	•

SOFTWARE		
SOFTWARE FUNCTIONS	STSys 3	MYCenter Material
Component management	•	•
Stock monitoring	•	•
External communication protocol	•	•
User access system	•	•
Traceability	•	•
Job preparation	•	•
Barcoding	• ⁽¹⁾	•
Data import/export function	•	•
Inventory function	•	•
Component allocation	•	

(1) Check STSys version

MSD STORAGE	
COMPRESSED DRY AIR	
Flow rate, max	(in) 24m³/h, (out) 20m³/h
Flow rate, type	3m³/h
Air supply	Class 4 (ISO 8573-1) or better
Operating pressure	5-10bar
Power supply	230/115V, 50/60hz, 18W
Dimension (WxDxH)	330mmx270mmx840mm (13.0"x10.6"x33.1")

DEHUMIDIFIER - ELECTRIC	
Weight	32kg
Power supply	230/115V, 50/60hz
Dimension (WxDxH)	435mmx243mmx663mm

MYTower 5

The MYTower 5 is Mycronic's most compact component storage system. Perfectly suited for customers with limited ceiling height in their factory. The MYTower 5 has a maximum capacity of 812 reels, and is easily configurable to store 4-15" reels.



STANDARD CONFIGURATION (ALL MYTOWER WILL BE CUSTOMIZED BASED ON USERS REQUIREMENT)


Reel size	Number of reels	Total
8mm/4-7"	56	354
8mm/13"	56	
8mm/15"	0	
12mm/4-7"	48	
12mm/13"	36	
12mm/15"	24	
16mm/4-7"	20	
16mm/13"	30	
16mm/15"	10	
24mm/4-7"	0	
24mm/13"	16	
24mm/15"	16	
32mm/4-7"	0	
32mm/13"	14	
32mm/15"	14	
44mm/13"	5	
44mm/15"	5	
56mm/13"	0	
56mm/15"	4	

MISCELLANEOUS

INSTALLATION REQUIREMENTS

Weight	270kg/600lbs
Power requirements	Single phase AC 300VA
Voltage	230/115V, 50/60hz
Ambient temperature	18-35°C (65-95°F), < 95% RH non condensing

DIMENSIONS

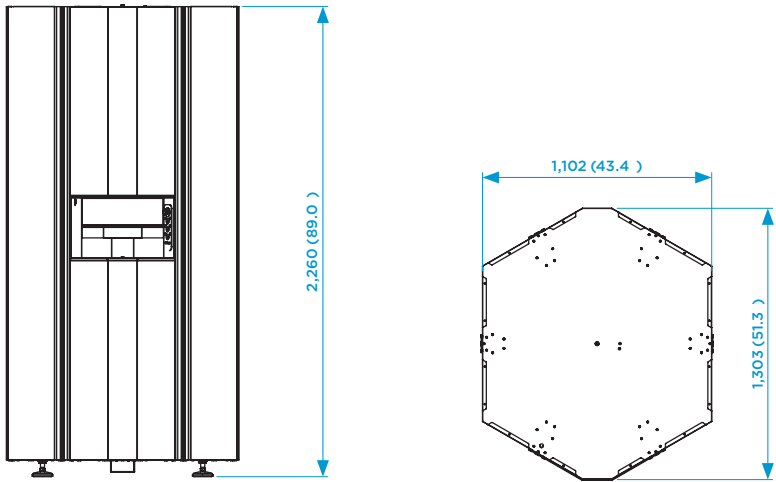

MYTower 6

The MYTower 6 has a capacity of 980 reels, suited for storing large quantity of 4-13” reels as well as 15” reels. Coming in at under 1.5m² this component storage system has the same footprint as the MYTower 5, but has one extra row of magazines enabling a higher capacity.



STANDARD CONFIGURATION (ALL MYTOWER WILL BE CUSTOMIZED BASED ON USERS REQUIREMENT)


Reel size	Number of reels	Total
8mm/4-7"	56	418
8mm/13"	70	
8mm/15"	0	
12mm/4-7"	48	
12mm/13"	36	
12mm/15"	24	
16mm/4-7"	40	
16mm/13"	30	
16mm/15"	10	
24mm/4-7"	0	
24mm/13"	24	
24mm/15"	24	
32mm/4-7"	0	
32mm/13"	21	
32mm/15"	21	
44mm/13"	5	
44mm/15"	5	
56mm/13"	0	
56mm/15"	4	

MISCELLANEOUS

INSTALLATION REQUIREMENTS

Weight	340kg/750 lbs
Power requirements	Single phase AC 300 VA
Voltage	230/115V, 50/60hz
Ambient temperature	18-35°C (65-95°F), <95% RH non condensing

DIMENSIONS

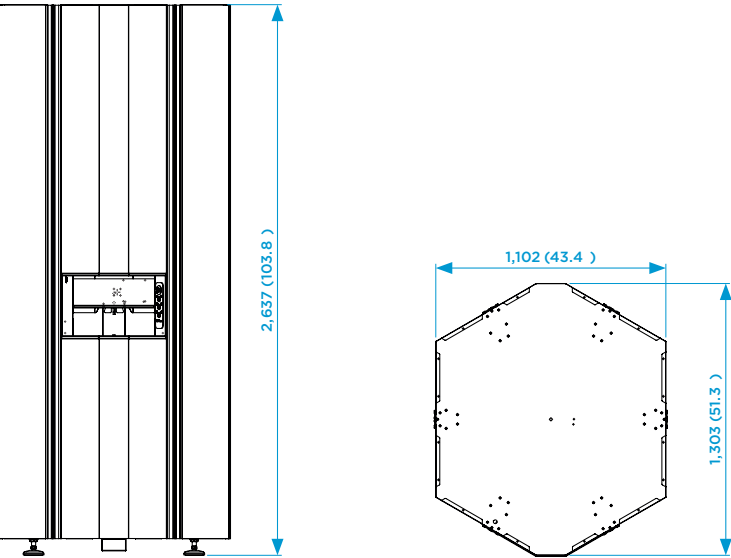

MYTower 6+

The MYTower 6+ have the same height as the MYTower 6, with the key difference being the ability to store 15” reels in all magazines within the storage system. This model has a maximum capacity of 980 reels whilst giving the customer flexibility to store any size of reel.




STANDARD CONFIGURATION (ALL MYTOWER WILL BE CUSTOMIZED BASED ON USERS REQUIREMENT)

Reel size	Number of reels	Total
8mm/4-7"	0	287
8mm/15"	0	
12mm/4-7"	0	
12mm/15"	72	
16mm/4-7"	0	
16mm/15"	80	
24mm/4-7"	0	
24mm/15"	56	
32mm/4-7"	0	
32mm/15"	42	
44mm/15"	25	
56mm/15"	12	

MISCELLANEOUS

INSTALLATION REQUIREMENTS	
Weight	360kg/794lbs
Power requirements	Single phase AC 300VA
Voltage	230/115V, 50/60hz
Ambient temperature	18-35°C (65-95°F), < 95% RH non condensing

DIMENSIONS

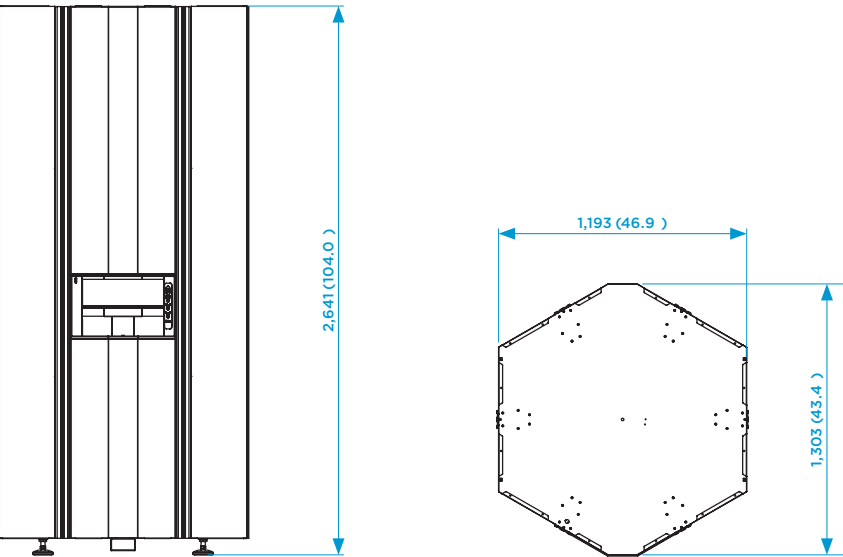

MYTower 7+

The MYTower 7+ has really high capacity with up to 1,148 reels. This component storage system has a footprint of 1.55m², a height of above 3m, and is designed to store the large quantities of reels right next to your SMT lines.




STANDARD CONFIGURATION (ALL MYTOWER WILL BE CUSTOMIZED BASED ON USERS REQUIREMENT)

Reel size	Number of reels	Total
8mm/4-7"	392	663
8mm/15"	28	
12mm/4-7"	48	
12mm/15"	48	
16mm/4-7"	20	
16mm/15"	40	
24mm/4-7"	0	
24mm/15"	32	
32mm/4-7"	0	
32mm/15"	28	
44mm/15"	15	
56mm/15"	12	

MISCELLANEOUS

INSTALLATION REQUIREMENTS	
Weight	580kg/1,279lbs
Power requirements	Single phase AC 300VA
Voltage	230/115V, 50/60hz
Ambient temperature	18-35°C (65-95°F), <95% RH non condensing

DIMENSIONS

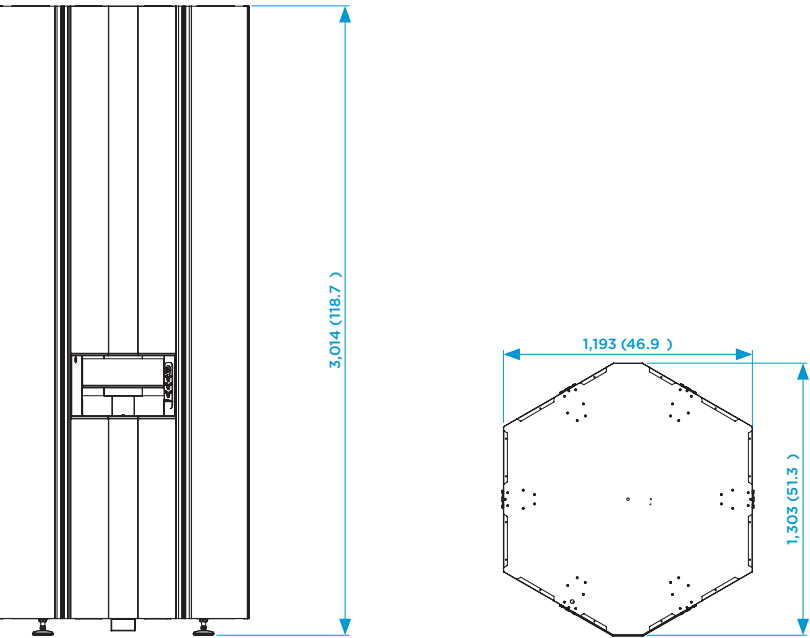

MYTower 5x

The MYTower 5x is perfect for customers with height restrictions, looking to store as many reels as possible, whilst utilizing as little floorspace as possible. Perfect for storing large quantities of 7" reels, with a maximum capacity of 1,652 reels in a footprint less than 2m². Can be used both as a main warehouse or as buffer storage close to your production line.




STANDARD CONFIGURATION (ALL MYTOWER WILL BE CUSTOMIZED BASED ON USERS REQUIREMENT)

Reel size	Number of reels	Total
8mm/4-7"	280	1,109
8mm/15"	28	
12mm/4-7"	240	
12mm/15"	36	
16mm/4-7"	200	
16mm/15"	0	
24mm/4-7"	160	
24mm/15"	16	
32mm/4-7"	140	
32mm/15"	0	
44mm/15"	5	
56mm/15"	4	

MISCELLANEOUS

INSTALLATION REQUIREMENTS	
Weight	650kg /1,433lbs
Power requirements	Single phase AC 500VA
Voltage	230/115V, 50/60hz
Ambient temperature	18-35°C (65-95°F), < 95% RH non condensing

DIMENSIONS

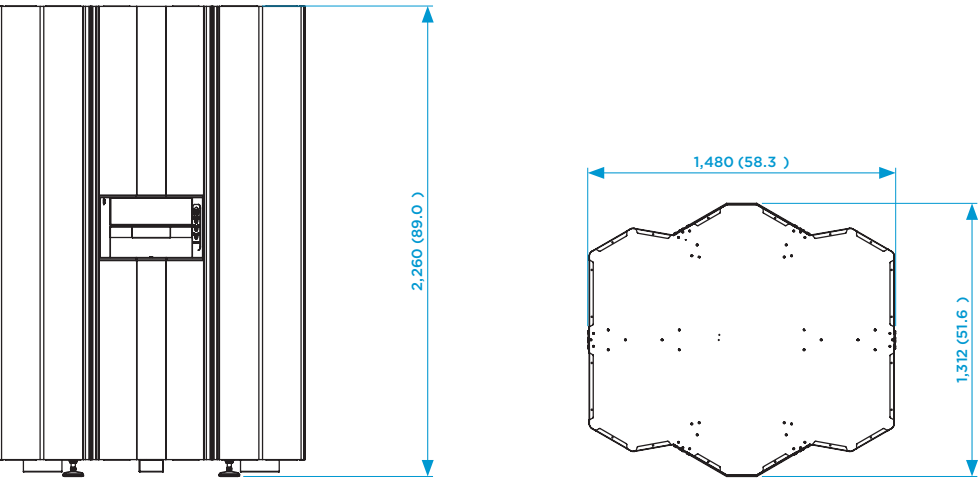

MYTower 6x

Mycronic's largest component storage system capable of storing 1,988 reels in less than 2m². This component storage system is the same height as the MYTower 6 and MYTower 6+, but with a new storage technology, is able to store large quantities of reels. Can be used both as a main warehouse or as buffer storage close to your production line.




STANDARD CONFIGURATION (ALL MYTOWER WILL BE CUSTOMIZED BASED ON USERS REQUIREMENT)

Reel size	Number of reels	Total
8mm/4-7"	280	1,371
8mm/15"	28	
12mm/4-7"	480	
12mm/15"	48	
16mm/4-7"	200	
16mm/15"	10	
24mm/4-7"	160	
24mm/15"	16	
32mm/4-7"	140	
32mm/15"	0	
44mm/15"	5	
56mm/15"	4	

MISCELLANEOUS

INSTALLATION REQUIREMENTS	
Weight	750kg/1653lbs
Power requirements	Single phase AC 500VA
Voltage	230/115V, 50/60hz
Ambient temperature	18-35°C (65-95°F), < 95% RH non condensing

DIMENSIONS

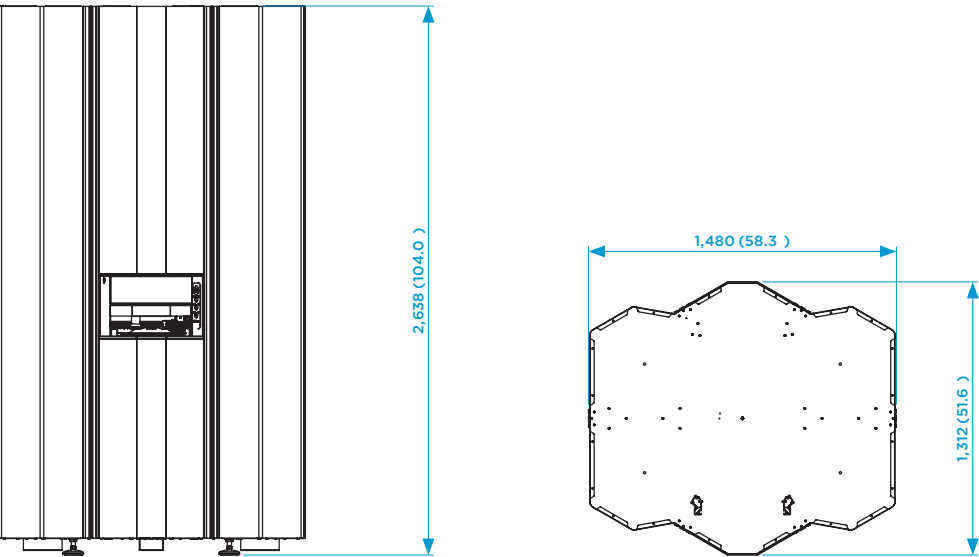

Bringing tomorrow's electronics to life

MYCRONIC

MYCRONIC.COM

SWEDEN

Mycronic AB
PO Box 3141
Nytörpsvägen 9
SE-183 03 Täby
Sweden

Tel: +46 8 638 52 00

NETHERLANDS

Mycronic B.V.
High Tech Campus 10
5656 AE
Eindhoven
Netherlands

Tel: +31 402 62 06 67

FRANCE

Mycronic S.A.S.
1 rue de Traversière
CS 80045
94513 Rungis Cedex 1
France

Tel: +33 1 41 80 15 80

SOUTH KOREA

Mycronic Co. Ltd.
3rd Floor, Jung-San
Bldg. 1026-8
Sanbon-Dong, Gunpo-Si
Gyeonggi-Do, 15808
South Korea

Tel: +82 31 387 5111

SINGAPORE

Mycronic Pte., Ltd.
380 Jalan Besar #16-01
Singapore 209000

Tel: +65 6281 7997

GERMANY

Mycronic GmbH
Inselkammerstraße 10
D-82008 Unterhaching
bei München
Germany

Tel: +49 89 4524248-0

UK

Mycronic Ltd.
Unit 2, Concept Park
Innovation Close
Poole, Dorset, BH12 4QT
UK

Tel: +44 1202 723 585

CHINA

Mycronic Co., Ltd.
Unit 106, E Block
Lane 168, Da Duhe Road.
Putuo District, 200062
Shanghai P.R. China

Tel: +86 21 3252 3785/86

USA

Mycronic Inc.
554 Clark Road
Tewksbury
MA 01876
USA

Tel: +1 978 948 6919

JAPAN

Mycronic Assembly
Solutions Co., Ltd.
1st floor Yokohama
Nishiguchi KN Bldg.
2-8-4 Kitasaiwai Nishi-ku
Yokohama-City,
Kanagawa Prefecture
220-0004, Japan

Tel: +81 42 433 9400

Specifications are subject to change without notice. Mycronic, MYDATA, MYDATA automation and MY; Mycronic 4.0; MYNews; MYCare; MYSynergy, MYTrilogy; MYPro, MYPro Line; MY100, MY100e, MY200, MY300, MY300DX, MY300EX, MY300HX, MY300LX, MY300SX, MY500, MY600, MY700, MY700JD, MY700JP, MY700JX; MYPro A40, A40DX, A40SX, A40LX; MYPro S20; MYPro S30; MYPro I50, I51, I80, I81, I90, I91; MYSmart, MYC10, MYC50, MYC60, MYD10, MYD50, MYT10, MYT50; Mycronic SMD Tower; MYTower 5, 6, 6+, 7+, 5x, 6x; Vi TECHNOLOGY, VIT; 5K, 5K3D, 8K, 8K3D, 9K, 9K3D; PI, PI Pico, PI Primo; SIGMA Link; MX7, HYDRA, Midas, ISIC; Agilis, Agilis Linear Magazine (ALM), Agilis Linear Magazine Flex (ALM FLEX), Agilis Stick Magazine (ASM), Agilis Tray Magazine (ATM); Mycronic Tray Exchanger (TEX); Mycronic Tray Wagon Magazine (TWM); Mycronic Dip Unit (DPU); Mycronic Linescan Vision System (LVS); Mycronic Assembly Process Management (APM) including; JPSys, STSys, TPSys, MYCam, MYCenter, MYCenter Analysis, MYLabel, MYPlan, MYPro Connect, MYPro Create, MYPro Link, MYTrace and FlowLine are registered trademarks or trademarks of Mycronic AB. Mycronic AB is ISO 9001:2015 and ISO 14001:2015 certified.